





Thank you for purchasing the our product. Before installing, please read the instruction carefully and keep it for future reference.

△ Attention!

- The lcd meter is apply for DC 12 V.
- For installation, please follow the steps described in manual. Any damage caused by wrong installation shall be imputed to the users.
- Don't break or modify the wire. To avoid the short circuit, please don't pull the wire when installing.
- Do not disassemble or change any parts excluding the manual description.
- The interior examination or maintenance should be executed by our professionals.

MARK MEANING:

NOTE You could get the installation details from the information behind the mark.

▲ WARNING! Some processes must be followed to avoid damages to yourself or the public.

A CAUTION! Some processes must be followed to avoid the damage to the vehicle


1 Accessories





NOTE Please contact the local distributor if the items you open are not the same, with the above-listed one.

2 Wiring installation instructions

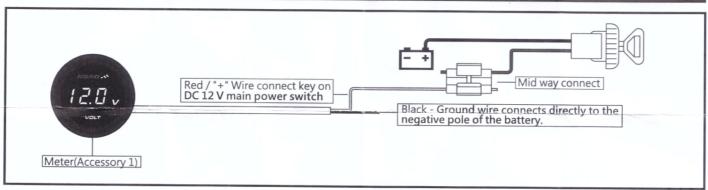

3 Installation of function



| ●Volt meter | Display range: DC 7.0 ~ 19.9 V |
|---|--|
| | Display unit: 0.1 V |
| OVoltage warning | When the volyage is lower than 12 V, the meter will flash to warn you. |
| ●Effective voltage | DC 12 V |
| Effective temperature range | -10 ~ +60°C |
| Meter standard | JIS D 0203 S2 |
| ●Meter size | Ø40 x 11 mm |
| ● Meter weight | Around 24 g |

NOTE Design and specifications are subject to change without notice!

4 Trouble shooting

The following situation do not indicate malfunction of the meter. Please check the following before taking it in for repair.

| 5 | | | | |
|--|---|------------------------------------|---|--|
| | Check item | Trouble | Check item | |
| The meter doesn't work when the power is on. | The power doesn't supply to the meter. →Please make sure the wiring is connected. The wiring and fuse are not broken. →The battery is broken or the battery is too old to supply enough power (DC 7 V) to make the meter work. | The meter shows wrong information. | Please check the voltage of your battery, and make sure the voltage is over DC 7 V. | |

XIf the problem persists after reviewing the options above, please contact your local distributor.